


XC-03 Series Magnetism Switch

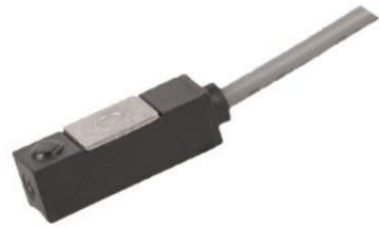


Features and Applications

- 1.Compact design
- 2.LSU type LED light
- 3.Anti-vibration application
- 4.Simple installation
- 5.BK series metal band together
- 6.Suitable for many kinds of air cylinder.


Specification

Model	XC-03R	XC-03N	XC-03P
Connect Diagram			
Parameter			
Wiring method	2-WireType	3-WireType	
Switching logic	SPST Normally Open	Solid State Output, Normally Open	
Sensor type	Reed switch	NPN Input	PNP Output
Operating voltage	5-240V DC/AC	5-30V DC	
Max.switching current	100mA max.	200mA max.	
Contact rating	10W max.	6W max.	
Current consumption	None	20mA max @ 24V(Switch Active)	
Voltage drop	3.0V max.	0.5V max @ 200mA	
Leakage current	None	0.01mA max.	
Indicator	Red LED	Red LED	Green LED
Max.exchange frequency	200Hz	1000Hz	
Temperature range		-10~70°C	
Shock	30G	50G	
Vibration		9G	
Enclosure classification		IEC 529 IP67(NEMA 6)	
Protection circuit	None	With protection	
Cable	Φ2.8,2C PVC Gray color,oil resistance PVC	Φ2.8,2C PVC Black color,oil resistance PVC	

Overall Dimensions

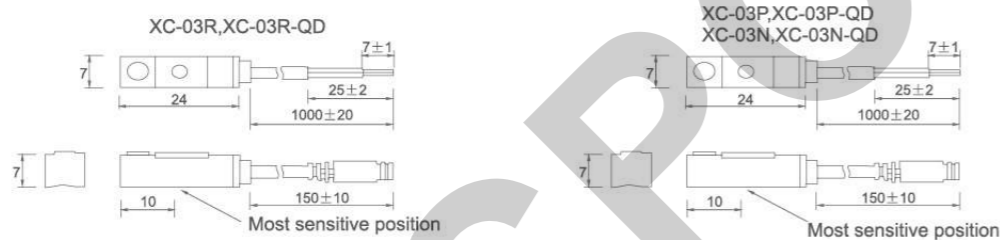

Joint Pipe Bore

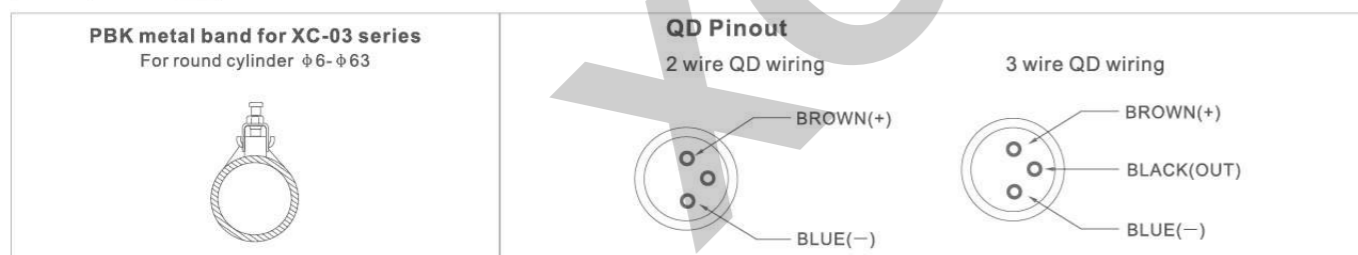

XC-21R Series Magnetism Switch




Features and Applications

- 1.Compact design
- 2.LED light
- 3.Anti-vibration application
- 4.PI,PM series clamp together
- 5.Simple installation
- 6.Suitable for all kinds of standard tie-rod and mickey-mouse barrel cylinder.

Specification

Model	XC-21R	XC-21N	XC-21P
Connect Diagram			
Parameter			
Wiring method	2-WireType	3-WireType	
Switching logic	SPST Normally Open	Solid State Output, Normally Open	
Sensor type	Reed switch	NPN Input	PNP Output
Operating voltage	5-240V DC/AC	5-30V DC	
Max.switching current	100mA max.	200mA max.	
Contact rating	10W max.	6W max.	
Current consumption	None	20mA max@ 24V(Switch Active)	
Voltage drop	3.5V max.	0.5V max	
Leakage current	None	0.01mA max.	
Indicator	Red LED	Red LED	Green LED
Max.exchange frequency	200Hz	1000Hz	
Temperature range		-10~70°C	
Shock	30G	50G	
Vibration		9G	
Enclosure classification		IEC 529 IP67(NEMA 6)	
Protection circuit	None	With protection	
Cable	Φ4.0,2C PVC Gray color,oil resistance PVC	Φ4.0,2C PVC Black color,oil resistance PVC	

Overall Dimensions

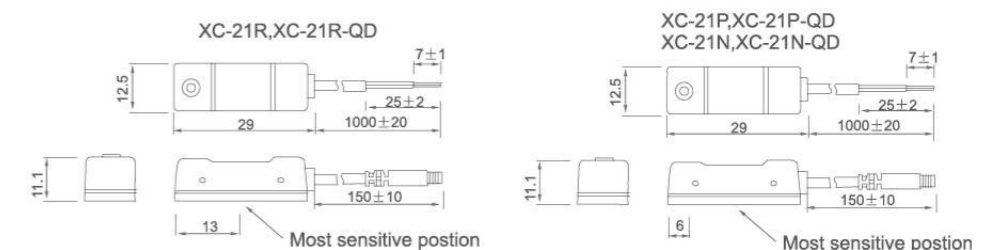

Joint Pipe Bore

